

FISHING TOOLS

ROD RECOVERING TAPS



This is most commonly used for recovery of drill rod of corresponding sizes. "V" threads are sharpened and heat-treated for cutting and gripping actions.

Sizes	OD of end	Max OD	Length
EW – EQ	22.8	35.0	278 mm
AW – AQ	22.2	44.5	284 mm
BW – BQ	31.8	55.6	310 mm
NW – NQ	31.8	69.9	292 mm


CASING RECOVERING TAPS



This tap is recommended to use when casings are unscrewed in the hole. The minimal taper assures effective gripping action without distortion of OD of casing.

Sizes	OD of end	Max OD	Length
EX – EW	30.2	46.0	190 mm
AX – AW	41.2	57.1	208 mm
BX – BW	52.4	73.0	235 mm
NX – NW	61.9	88.9	286 mm
114 – 10T	82.3	114.3	350 mm
120 – 10T	88.0	120.0	350 mm
140 – 10T	107.8	139.8	350 mm

BELL TAPS

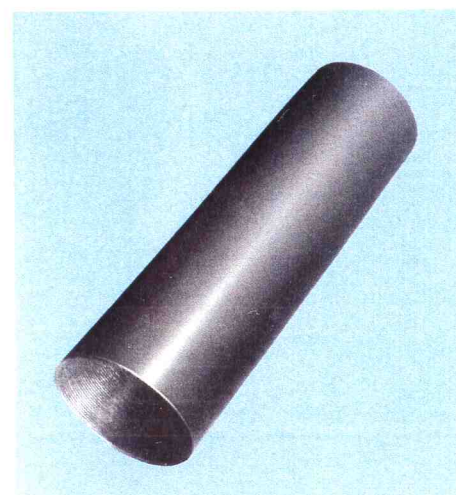

This tap is designed to overlap and to encase drill rod or casing. Bell tap is recommended to use when internal gripping tools are unable to operate effectively.

Sizes	ID of end	Min. OD	Length
AW	45.0	31.8	200 mm
BW	54.0	41.4	213 mm
NW	66.8	53.9	241 mm